

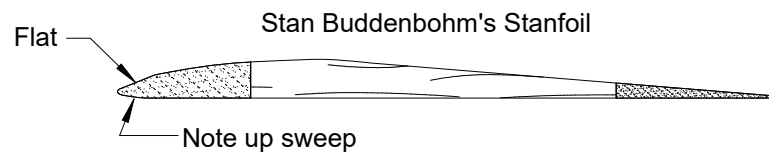
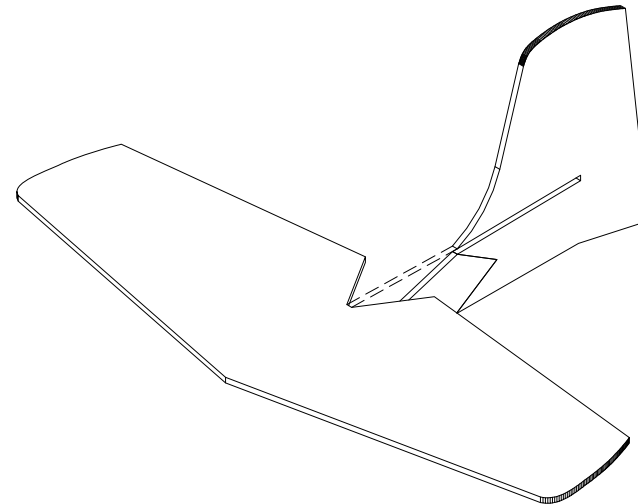


Make two nose doublers from 1/64" plywood. Glue a doubler to each side of the fuselage nose.

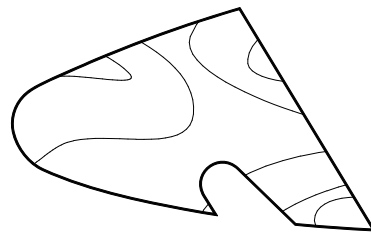


Wing root cross section

Fin is 1/16" balsa

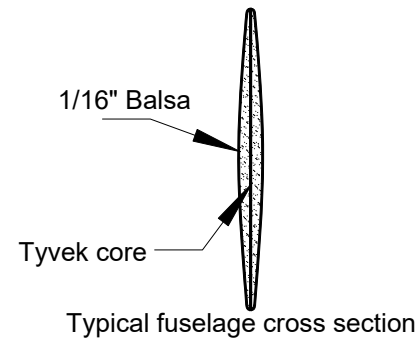

The stab is set with some negative incidence. Glue 1/16" square strips (Gurney flaps) to the bottom of the elevator trailing edges. This controls looping during the launch. Adjust the Center of Gravity to achieve a good glide.

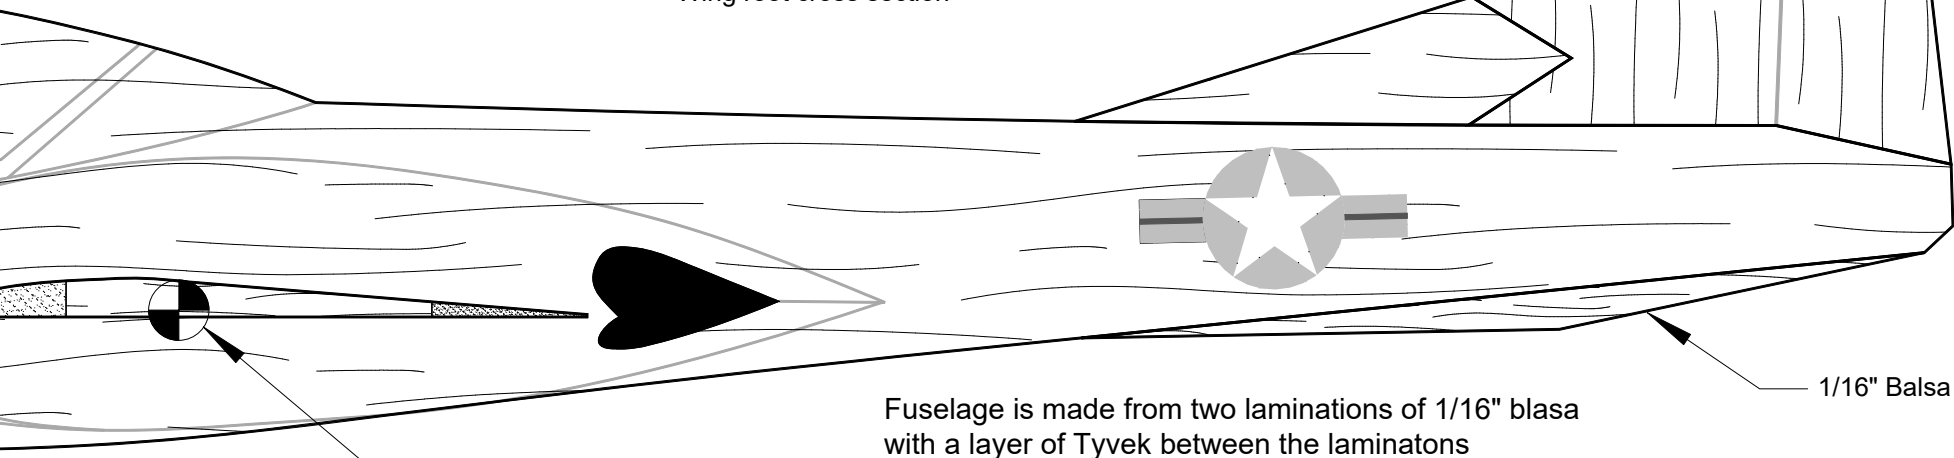

Fuselage is made from two laminations of 1/16" balsa with a layer of Tyvek between the laminations

CG is 1 9/32" aft of the wing root leading edge



INCHES

T-37 Jet Cat
17" Wing Span
Designed by Paul Bradley
August 2019