



TYPICAL LANDING GEAR MOUNTING IS SHOWN BELOW. SPITFIRE GEAR SLANTS OUT 1/2" OTHERS VERT



DIHEDRAL

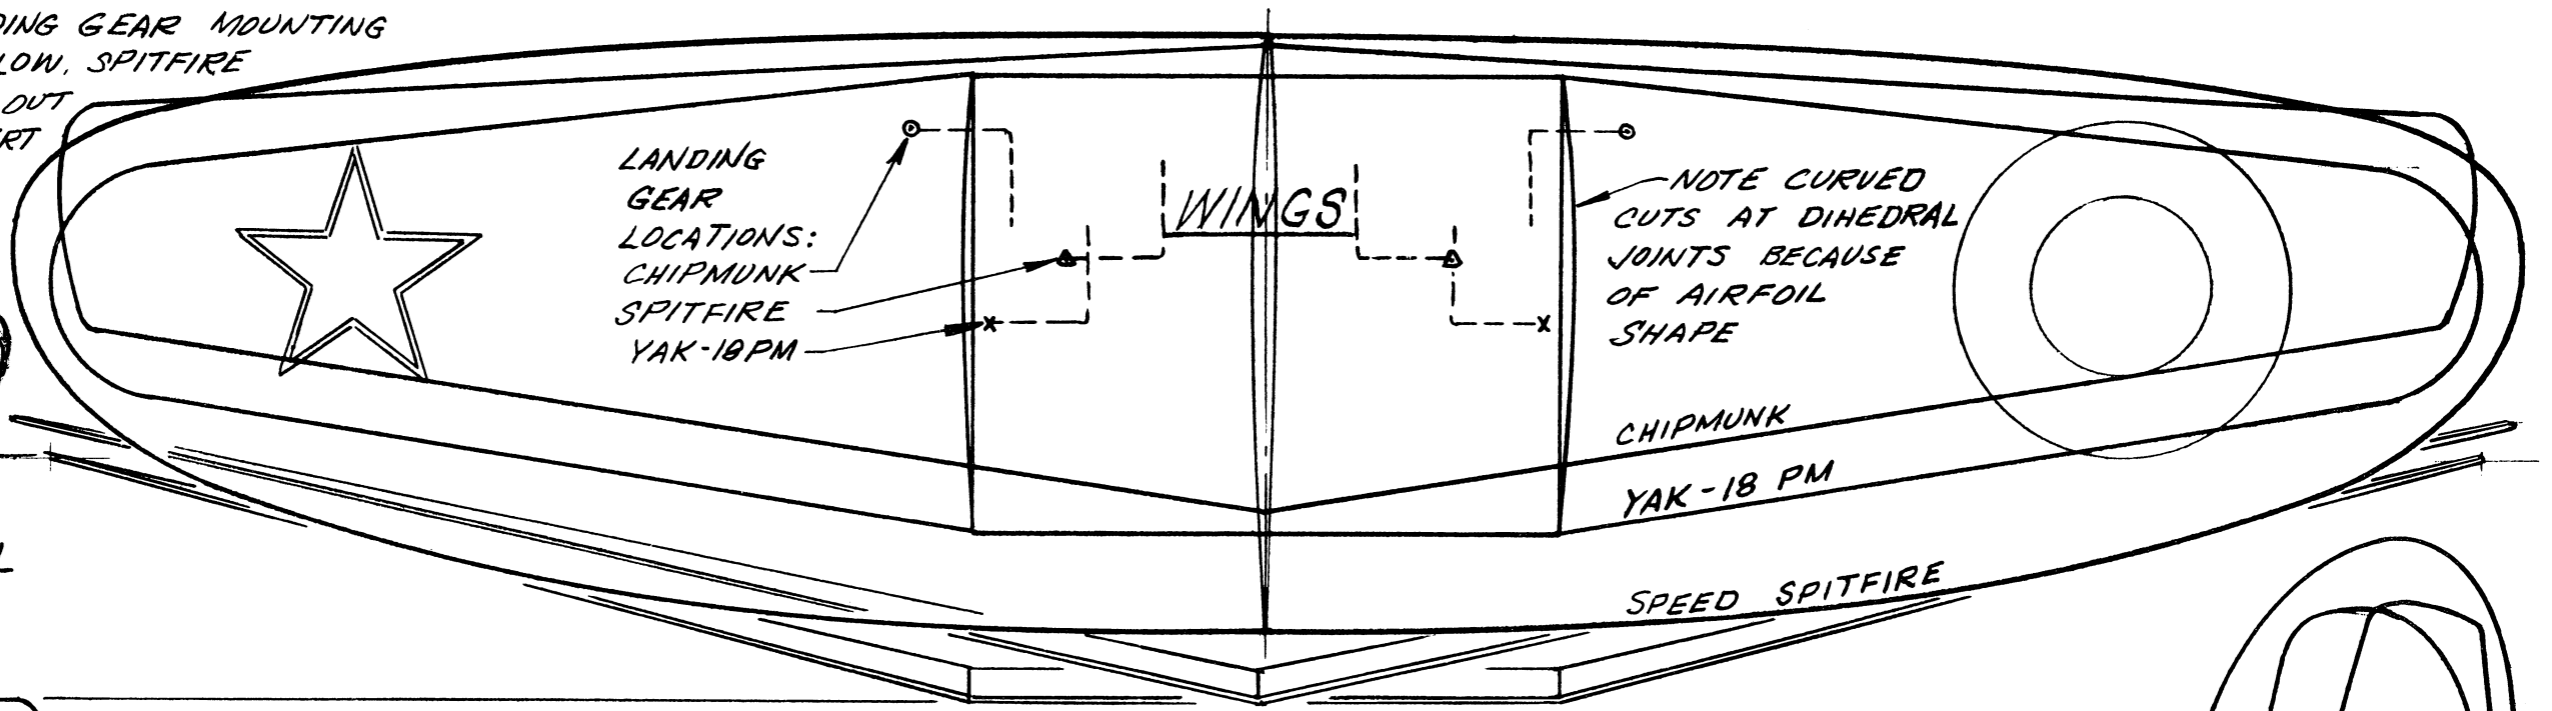

SPEED SPITFIRE

SPEED SPITFIRE

YAK-18 PM

YAK-18 PM

CHIPMUNK

YAK

CHIPMUNK

1/8 TH Balsa NOSE DOUBLERS CEMENT ON BOTH SIDES OF ALUMINUM TUBE BEARING - USE PLASTIC PROP TRIMMED TO CLEAR GROUND

CHIPMUNK
YAK
SPITFIRE

LANDING GEAR SUPPORT PAD 1/8 TH Balsa-WIRE IS CEMENTED TO IT.

YAK
SPIT
CHIP

SPITFIRE

YAK

SPITFIRE

HORIZONTAL TAILS

CHIPMUNK
YAK NOSE GEAR

C.G.

YAK MAIN LANDING GEAR

SPITFIRE

ALL WIRES SHOWN TRUE LENGTH IN THIS VIEW

- NOTES: 1. ALL FUSELAGES ARE 1/8 TH SHEET Balsa.
2. ALL TAIL SURFACES ARE 1/32 ND. SHEET Balsa.
3. ALL WINGS MADE FROM 1/32 ND. SHEET Balsa.
4. USE 1/32 ND. DIAMETER WIRE FOR ALL LANDING GEARS

5. USE HARDWOOD, PLASTIC OR Balsa WHEELS - NOTE DIAMETER.
6. USE STRAIGHT PIN FOR REAR MOTOR PEG.
7. GIVE ALL BalsaWOOD PARTS A LIGHT COAT OF SANDING SEALER, SANDPAPER SMOOTH AND DECORATE WITH FELT PEN.

THREE PROFILE PEANUTS
D.H. CHIPMUNK, YAK-18 PM, SPEED-SPITFIRE
DESIGNED BY DOUGLAS MARTIN MOONEY
DRAWN BY *Dalt Mooney* 4-27-72